

**WALL-MOUNTED** STANDARD **INVERTER** Single-Split Type



CS-PU9WKQ | CS-PU12WKQ | CS-PU18WKQ



Wireless (Standard)



Wired CZ-RD514C (Optional)



Network Adaptor CZ-TACG1 (Optional)

**NEW**



CS-PU24XKQ



Wireless (Standard)



Wired CZ-RD514C (Optional)




Network Adaptor CZ-TACG1 (Optional)

**BIG FLAP** | **AEROWINGS** | **POWERFUL** | **INVERTER** | **ECO+AI.**  
(CS-PU9/12/18WKQ) (CS-PU24XKQ)

MODEL	INDOOR UNIT (60Hz)		CS-PU9WKQ	CS-PU12WKQ	CS-PU18WKQ	CS-PU24XKQ
	OUTDOOR UNIT		CU-PU9WKQ	CU-PU12WKQ	CU-PU18WKQ	CU-PU24XKQ
Cooling Capacity	(min-max)	kW	2.54 (0.84-3.10)	3.06 (1.02-3.80)	5.00 (1.10-5.40)	6.10 (1.12-7.18)
	(min-max)	kJ/h	9,140 (3,020-11,160)	11,020 (3,670-13,680)	18,000 (3,960-19,440)	21,960 (4,030-25,850)
EER	(min-max)	kJ/hW	13.64 (13.73-12.61)	14.69 (14.98-11.69)	11.61 (13.66-10.80)	13.31 (16.12-12.61)
Electrical Data	Voltage	V	230	230	230	230
	Current	A	3.2	3.4	7.0	7.4
	Power Input (min-max)	W	670 (220-885)	750 (245-1,170)	1,550 (290-1,800)	1,650 (250-2,050)
Moisture Removal		L/h (Pt/h)	1.6 (3.4)	1.7 (3.6)	2.8 (5.9)	3.4 (7.2)
Air Circulation	Indoor	m <sup>3</sup> /min (ft <sup>3</sup> /min)	10.3 (365)	10.8 (380)	12.6 (445)	19.2 (680)
	Outdoor	m <sup>3</sup> /min (ft <sup>3</sup> /min)	27.3 (960)	31.6 (1,120)	39.3 (1,390)	34.9 (1,230)
Noise Level	Indoor (H / L / Q-Lo)	dB (A)	36/26/21	38/28/21	44/34/28	45/36/29
	Outdoor (H)	dB (A)	47	48	51	51
Unit Dimensions Indoor (Outdoor)	Height	mm	290 (511)	290 (542)	290 (619)	295 (619)
		inch	11-7/16 (20-1/8)	11-7/16 (21-11/32)	11-7/16 (24-3/8)	11-5/8 (24-3/8)
	Width	mm	779 (650)	779 (780)	779 (824)	1,040 (824)
		inch	30-11/16 (25-19/32)	30-11/16 (30-23/32)	30-11/16 (32-15/32)	40-31/32 (32-15/32)
	Depth	mm	209 (230)	209 (289)	209 (299)	244 (299)
		inch	8-1/4 (9-1/16)	8-1/4 (11-13/32)	8-1/4 (11-25/32)	9-5/8 (11-25/32)
Packaging Dimensions Indoor (Outdoor)	Height	mm	255 (578)	255 (603)	255 (680)	314 (680)
		inch	10-1/16 (22-25/32)	10-1/16 (23-3/4)	10-1/16 (26-25/32)	12-3/8 (26-25/32)
	Width	mm	861 (784)	861 (891)	861 (958)	1,148 (958)
		inch	33-29/32 (30-7/8)	33-29/32 (35-3/32)	33-29/32 (37-23/32)	45-7/32 (37-23/32)
	Depth	mm	364 (347)	364 (396)	364 (416)	383 (416)
		inch	14-11/32 (13-11/16)	14-11/32 (15-19/32)	14-11/32 (16-13/32)	15-3/32 (16-13/32)
Net Weight	Indoor / Outdoor	kg (lb)	8 (18) / 18 (40)	8 (18) / 23 (51)	9 (20) / 29 (64)	12 (26) / 31 (68)
Gross Weight	Indoor / Outdoor	kg (lb)	9 (20) / 20 (44)	9 (20) / 25 (55)	10 (22) / 32 (71)	14 (31) / 34 (75)
Refrigerant Pipe Diameter	Liquid Side	mm (inch)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)
	Gas Side	mm (inch)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 12.70 (1/2)	ø 12.70 (1/2)
Pipe Extension	Chargeless Pipe Length	m	7.5	7.5	10.0	10.0
	Maximum Pipe Length	m	20	20	30	30
	Maximum Elevation Length	m	15	15	20	20
	Additional Refrigerant Gas*	g/m	10	10	15	15
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor


\*When pipes are not extended from the chargeless pipe length, the required amount of refrigerant is already in the unit.

**FEATURES**



**EASY-TO-USE REMOTE CONTROLLER**

Panasonic's wireless remote controller features a large Liquid Crystal Display (LCD) panel which makes it even more user-friendly. So you can sit back and enjoy easy operation and long-lasting comfort from your Panasonic Air Conditioner.

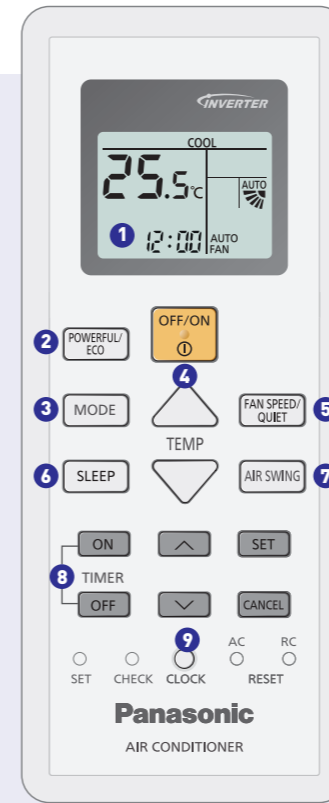

**Wireless**  
Applicable to STANDARD INVERTER

- 1 LCD display for an easy overview of the operation status.
- 2 Toggles setting between POWERFUL mode and ECO with A.I. setting mode. POWERFUL mode provides fast cooling while ECO with A.I. mode provides energy saving.
- 3 Toggles between AUTO, COOL and DRY setting mode.
- 4 Press up or down to set the temperature.
- 5 Adjusts the FAN SPEED or QUIET mode so you can sleep comfortably at night.
- 6 Delays off timer with temperature control for better sleep.
- 7 Set the airflow direction.
- 8 Set the 24-hour Dual ON & OFF Timer.
- 9 Set the actual time (hour and minute).



**Long Airflow with Big Flap**  
Big bottom flap directs cooling and comforting air across the room for an optimal cooling sensation.



**Powerful Cooling at Start-up**  
POWERFUL Mode cools your room faster by 18%\* at the start to bring you cooling comfort instantly on a hot day.  
\*Comparison of POWERFUL Cool Mode & normal cool mode by using 1.5HP Inverter Model.

**OUTDOOR UNIT**



CU-PU9WKQ



CU-PU12WKQ



CU-PU18WKQ  
CU-PU24XKQ